



ADVERTISED COPY

IGS INTEGRATED
GROUP
SERVICES

Value | Innovation | Trust

Stormwater Management Plan



1 – 9 Allen Street & 777 – 781 Warrigal Street
Oakleigh, VIC. 3166

Project No: 21048

Date: 10/09/2021

Document Control

| Version | Date | Author | | Reviewer | |
|---------|------------|----------------|----|-----------|----|
| 00 | 10/09/2021 | Barmak Ibrahim | BI | Chris Orr | CO |
| | | | | | |
| | | | | | |

"© 2019 IGS VIC Pty Ltd All Rights Reserved. Copyright in the whole and every part of this document belongs to IGS Pty Ltd and may not be used, sold, transferred, copied or reproduced in whole or in part in any manner or form or in or on any media to any person without the prior written consent of IGS PTY".

TABLE OF CONTENTS

| | |
|--|-----------|
| TABLE OF CONTENTS | 2 |
| 1 Executive Summary | 3 |
| 2 Overview | 4 |
| 2.1 Introduction..... | 4 |
| 2.2 Site Locality..... | 4 |
| 2.3 Site Layout..... | 5 |
| 3 Quality Management – Operational Controls | 6 |
| 3.1 Water Quality Objectives..... | 6 |
| 3.2 Treatment Train..... | 6 |
| 3.3 Rain Gardens..... | 7 |
| 3.4 Rainwater Tank..... | 10 |
| 4 Quality Analysis – MUSIC | 11 |
| 4.1 Rainfall and Evapotranspiration Parameters..... | 11 |
| 4.2 Catchment Parameters..... | 11 |
| 4.3 Treatment Node Parameters..... | 12 |
| 4.4 MUSIC Results..... | 12 |
| 5 Summary | 14 |
| 6 Recommendation | 14 |
| 6.1 Stormwater Quality Improvement Device..... | 14 |
| 6.1.1 Rainwater Tank..... | 14 |
| 6.1.2 Rain Gardens..... | 14 |
| 7 Site Managements Plan During Construction | 15 |
| 8 Maintenance | 16 |
| 9 References | 17 |

1 Executive Summary

Integrated Group Services (IGS) has been commissioned to prepare a Stormwater Management Plan (SWMP) for the proposed development located at 1 – 9 Allen Street & 777 – 781 Warrigal Street Oakleigh VIC 3166.

The stormwater quality modelling was undertaken using the MUSIC version 6.2 software. The modelling results (see Table 1.1) indicate the 70%, 80%, 45% and 45% reduction targets for Gross Pollutants (GP), Total Suspended Solids (TSS), Total Phosphorus (TP) and Total Nitrogen (TN) respectively can be achieved.

Due to the site and building configuration, only the larger roof space rainwater catchments are considered in preparation of stormwater managements reports. Refer to the below figure highlighting the extent of roof catchment.

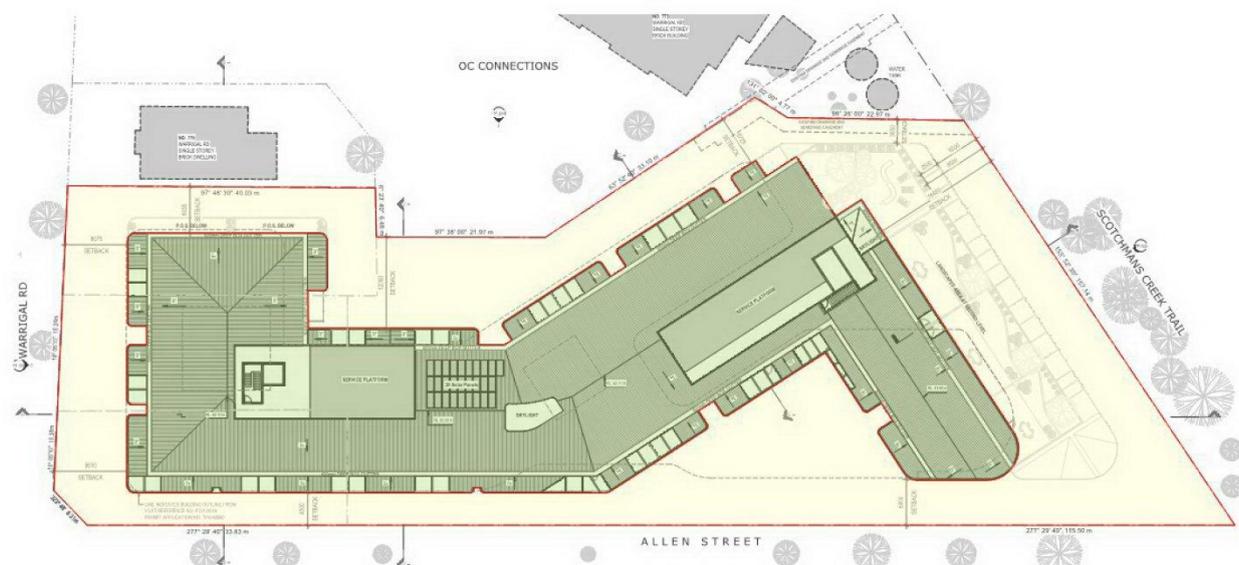


Figure 1.1: Roof areas (Overall site aerial view)

Table 1.1: Treatment Train Effectiveness (Multiple treatment zones)

| Pollutant | Inflows (kg/yr) | Outflows (kg/yr) | Reduction Achieved (%) | Reduction Target (%) |
|------------------------|-----------------|------------------|------------------------|----------------------|
| Flow (ML/yr) | 11.9 | 2.37 | 80.1 | 0 |
| Total Suspended Solids | 285 | 55.1 | 80.7 | 80 |
| Total Phosphorus | 2.85 | 0.369 | 87.1 | 45 |
| Total Nitrogen | 25.1 | 5.18 | 79.4 | 45 |
| Gross Pollutants | 450 | 0 | 100 | 70 |

Stormwater management of the site is achieved using the following devices:

- Minimum 25kL Rainwater Collection (Tank)
- 45m² Raingardens

2 Overview

2.1 Introduction

This report has been prepared by Integrated Group Services (IGS) to be considered part of a town planning application for the proposed development located at 1 – 9 Allen Street & 777 – 781 Warrigal Street Oakleigh VIC, 3166.

The proposed 4-storey retirement living development is located at 1-9 Allen Street & 777-781 Warrigal Road close to Scotchman’s Creek Linear Park. The development consists of:

- Lower Ground: Carpark, Communal facilities and Residential dwellings
- Ground to Level 02: Residential dwellings and Communal Facilities

2.2 Site Locality

The proposed development is to be built at 1 – 9 Allen Street & 777 – 781 Warrigal Street, Oakleigh, VIC 3166 and the Responsible Authority is the City of Monash.

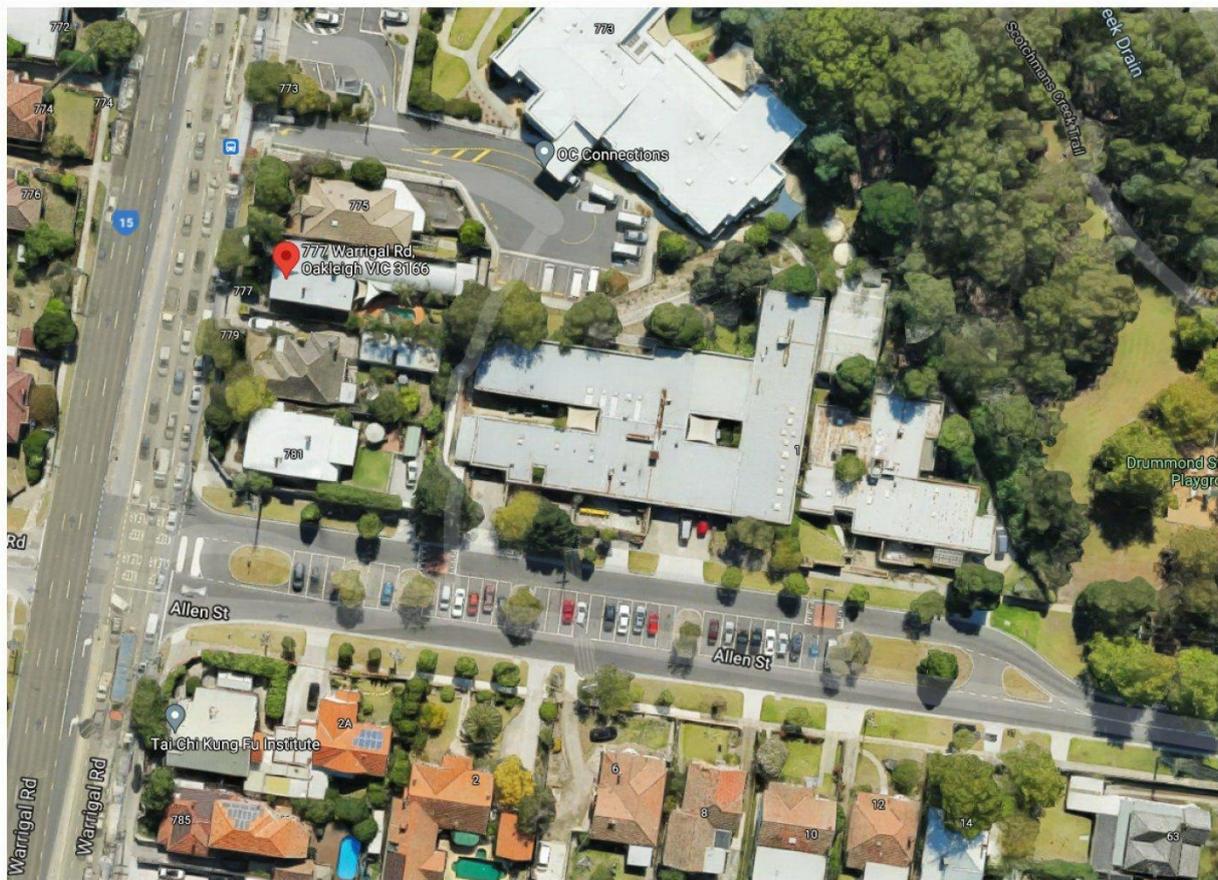


Figure 2.1 Site Location

2.3 Site Layout

The proposed development is presented within **Figure 2.2**.

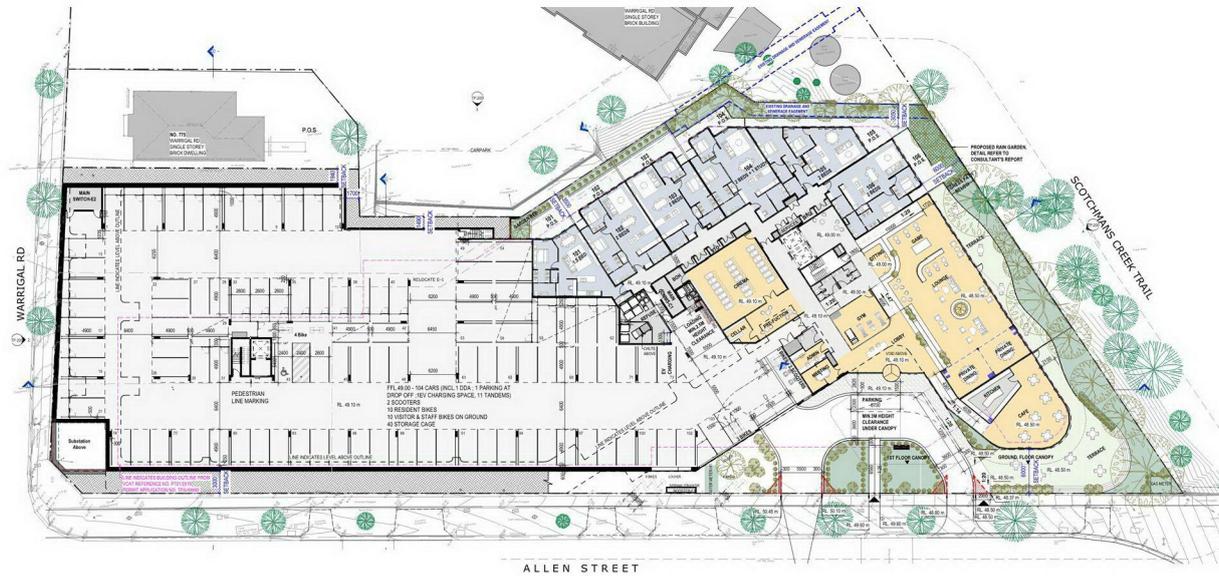


Figure 2.2 Proposed Site Layout



Figure 2.3 Allen Street (Drop off Area) of Proposed Site

3 Quality Management – Operational Controls

3.1 Water Quality Objectives

Melbourne Water (2018) requires treatment of stormwater so that annual pollutant loads achieve targets set out in the Best Practice Environmental Management Guidelines (BPEMG). These are the following targets:

- 80% reduction in Total Suspended Solids (TSS) from typical urban loads.
- 45% reduction in Total Nitrogen (TN) from typical urban loads.
- 45% reduction in Total Phosphorus (TP) from typical urban loads; and
- 70% reduction in Gross Pollutants (GP) from typical urban loads.

3.2 Treatment Train

Based on the site characteristics and the range of available Stormwater Quality Improvement Devices (SQIDs), this study has developed an overall concept that will satisfy the requirements of downstream environmental protection. **Figure 3.1** shows a schematic representation of the proposed treatment train elements.

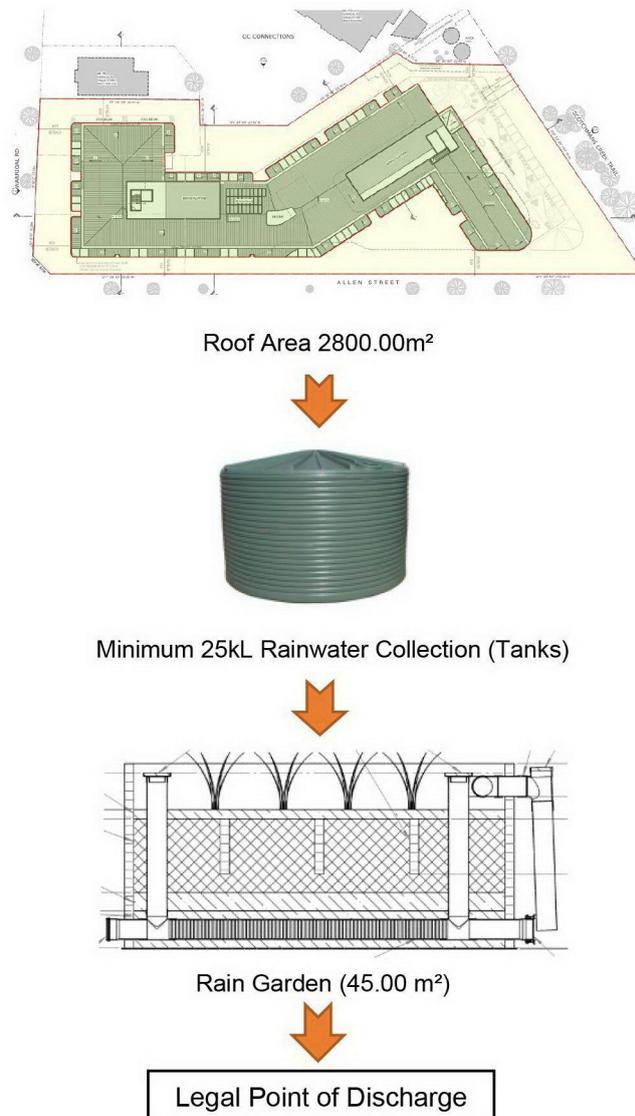


Figure 3.1 Treatment Train Schematic

3.3 Rain Gardens

Raingardens are specially designed garden beds that filter stormwater runoff from surrounding areas or stormwater pipes. Raingardens are also called bioretention systems because they use soil, plants, and microbes to biologically treat stormwater.

Although they may look similar to a normal garden, raingardens are designed to stop stormwater runoff from polluting Stormwater waterways with nutrients, rubbish and other sediments, the system operates as follows.

- Water collects and settles on the garden surface.
- Water soaks through the plants and filter media, trapping rubbish and sediment on the surface.
- Plants use the nutrients in the stormwater, and toxins stick to the soil; and
- The soil and plant roots work together to naturally filter the water and remove pollutants.



Figure 3.2 Typical Raingarden in ground illustration





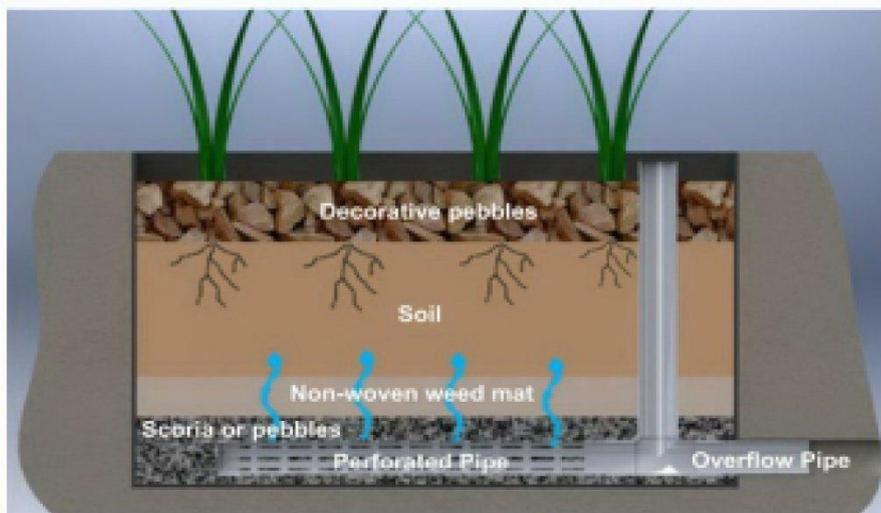


Figure 3.3 Typical Raingarden in ground for illustration purpose

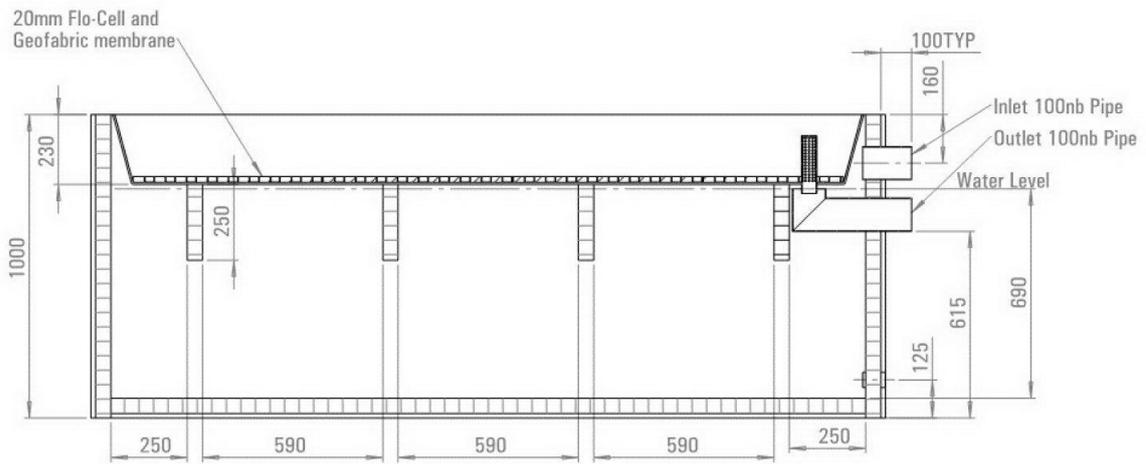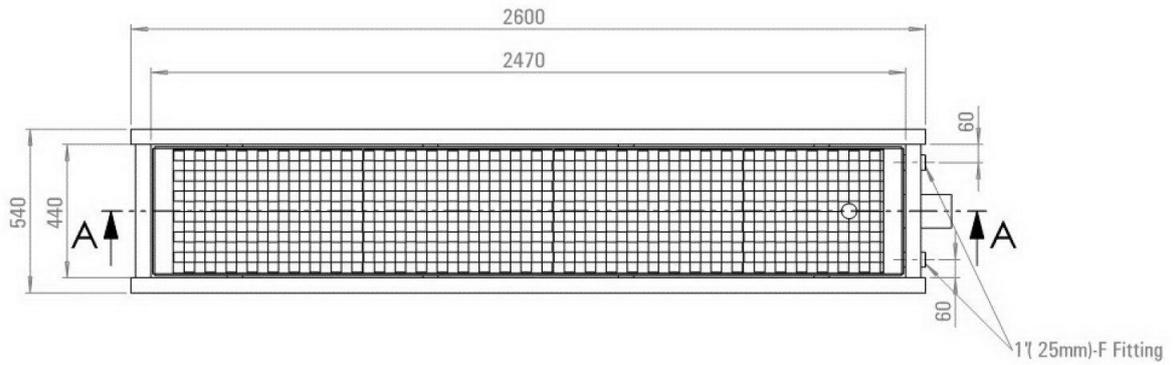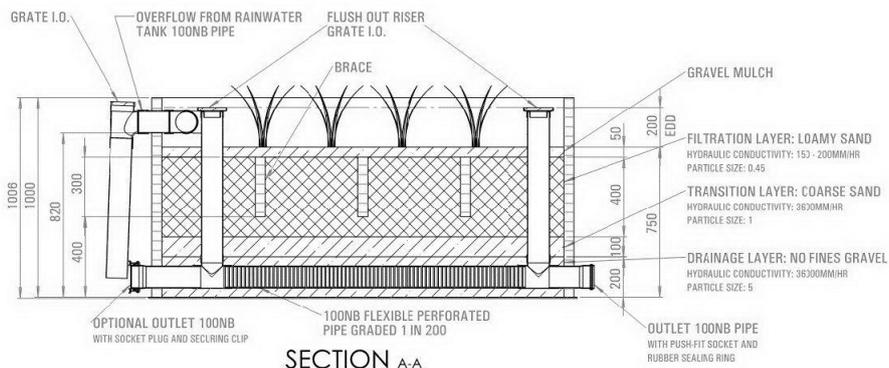

SECTION A-A

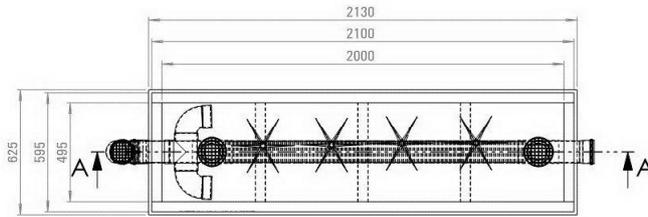

SECTION A-A

Figure 3.4 Typical Raingarden in ground diagram for illustration purpose

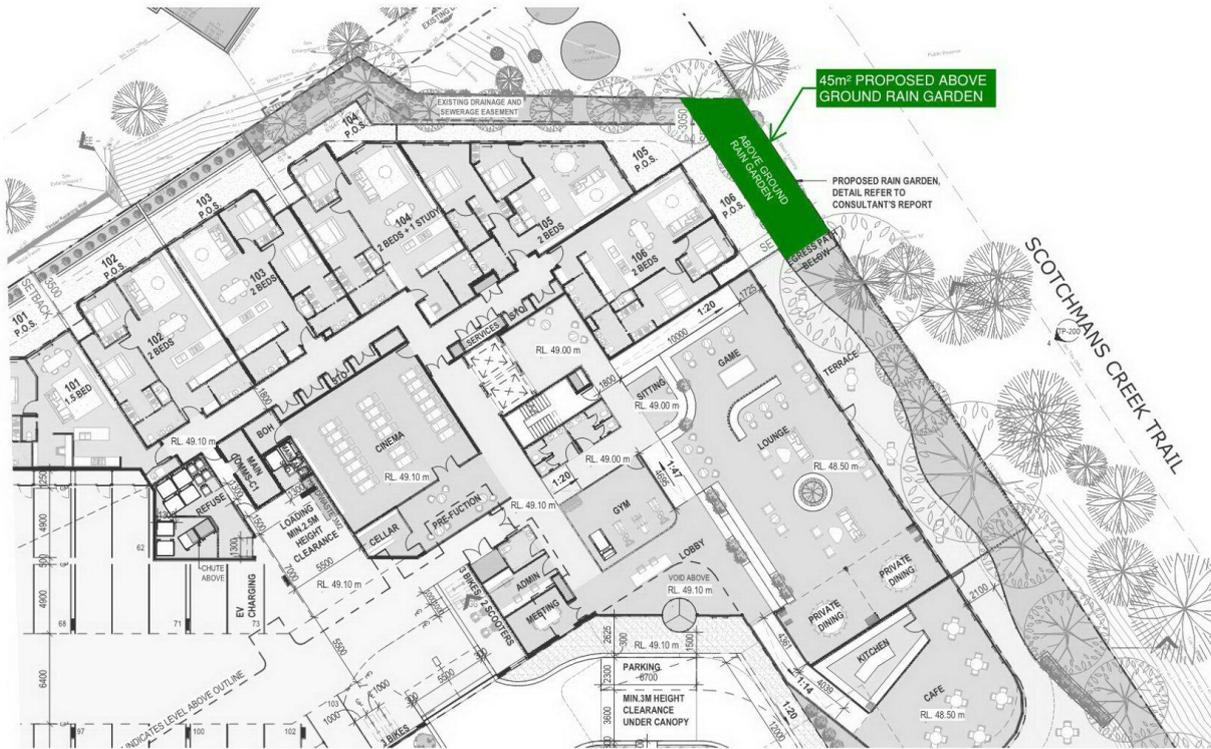


Figure 3.5 Proposed above ground Raingarden location within landscape zone

Node Water Balance - Raingardens

| | Flow (ML/yr) | TSS (kg/yr) | TP (kg/yr) | TN (kg/yr) | GP (kg/yr) |
|------------------------------|--------------|-------------|------------|------------|------------|
| Flow In | 11.8815 | 279.1427 | 2.5890 | 24.6184 | 0.0000 |
| ET Loss | 0.0931 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Infiltration Loss | 9.4180 | 128.2177 | 1.2743 | 13.6914 | 0.0000 |
| Low Flow Bypass Out | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| High Flow Bypass Out | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Pipe Out | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Weir Out | 2.3697 | 56.4283 | 0.3668 | 4.9567 | 0.0000 |
| Transfer Function Out | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Reuse Supplied | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| Reuse Requested | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| % Reuse Demand Met | 0.0000 | 0.0000 | 0.0000 | 0.0000 | 0.0000 |
| % Load Reduction | 80.0555 | 79.7851 | 85.8336 | 79.8657 | 0.0000 |

Decimal Places: 4

Figure 3.6 Raingarden Water Balance Parameters

3.4 Rainwater Tank

Rainwater tanks can reduce the harm to Stormwater waterways caused by too much stormwater. Tank water can be reused for toilet flushing, laundry washing, gardens and lawn irrigation and cars wash, this will significantly reduce the potable / drinking cold water consumption.

Rainwater tanks collect stormwater run-off from impervious surfaces such as roofs, the tank will be fitted with an overflow outlet that in the event of tank full capacity the excessive pour down will be redirected or fall into the stormwater drainage system.

Rainwater tanks are generally used for watering gardens are much less efficient than tanks used for flushing toilets.

Advantages of rainwater tanks are that they:

- minimise water usage when used in the toilet, laundry or garden.
- reduce strain on the stormwater drainage system.
- retain water close to source.
- reduce site run-off and flood peaks.

To maximise the use of roof rain water run-off it will be best to increase the tank capacity and ensure the design allows for maximum catchment. To maximise the use of rainwater allow for irrigation dripper line to a suitable garden area to ensure tank water suitably distributed.

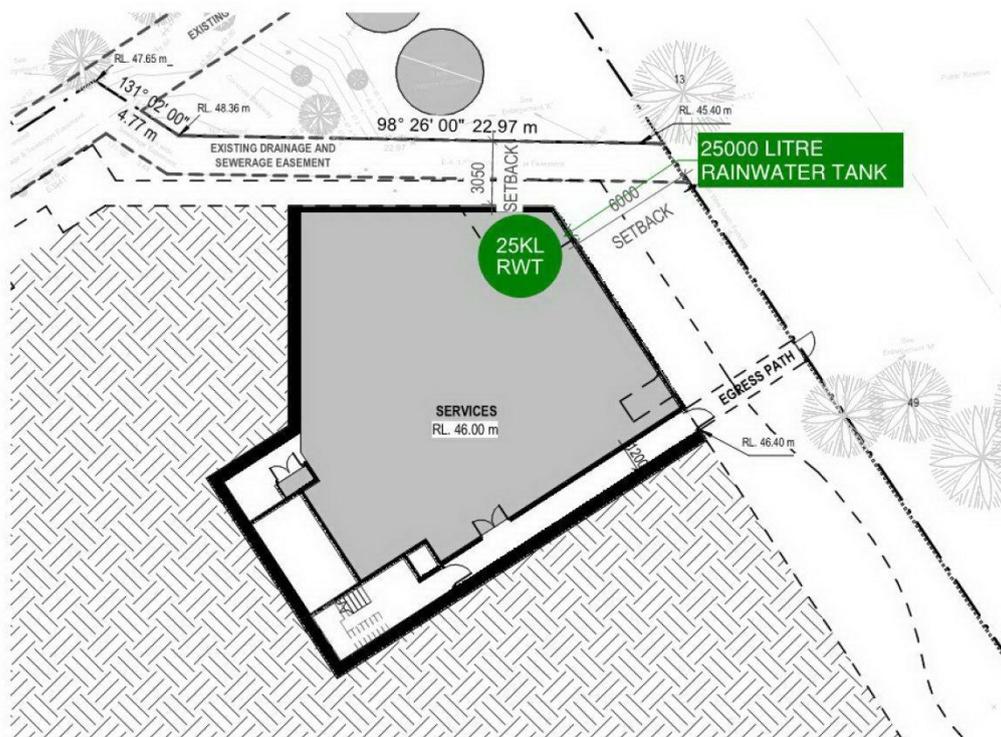


Figure 3.8 Proposed rainwater tank location within basement services plant area

4 Quality Analysis – MUSIC

Water quality modelling has been undertaken of the post-development (mitigated) scenario using the Model for Urban Stormwater Improvement Conceptualisation (MUSIC) software to demonstrate the load-based reduction targets are achieved. A stormwater treatment train has been developed and modelled to determine the effectiveness of the proposed system in achieving the relevant water quality objectives.

4.1 Rainfall and Evapotranspiration Parameters

The below table summaries' the meteorological and rainfall-runoff data used in the MUSIC model.

Table 4.1 Meteorological and Rainfall Runoff Data

| Parameter | Value |
|---------------------------|------------------------------|
| Rainfall station | 86071 – Melbourne City |
| Time step | 6 minutes |
| Modelling period | January 1966 – December 1966 |
| Mean annual rainfall (mm) | 678 mm |
| Evapotranspiration | 994 mm |

4.2 Catchment Parameters

Based on the proposed land uses within the development, the subject site has been modelled as an urban source node. The rainfall-runoff parameters and pollutant generation parameters are based on parameters recommended by Melbourne Water (2018) (Tables 4.2 and 4.3).

Table 4.2 Rainfall Runoff Parameters

| Parameter | All Nodes |
|-------------------------------------|-----------|
| Rainfall threshold (mm) | 1.0 |
| Soil storage capacity (mm) | 120 |
| Initial storage (% capacity) | 25 |
| Field capacity (mm) | 50 |
| Infiltration capacity coefficient a | 200 |
| Infiltration capacity exponent b | 1 |
| Initial depth (mm) | 10 |
| Daily recharge rate (%) | 25 |
| Daily base flow rate (%) | 5 |
| Daily deep seepage rate (%) | 0 |

Table 4.3: Pollutant Export Parameters for Urban Sites

| Catchment ID | | Total Suspended Solids [log (mm/L)] | | Total Phosphorous [log (mm/L)] | | Total Nitrogen [log (mm/L)] | |
|--------------|--------------------------|--|----------------|-----------------------------------|----------------|--------------------------------|----------------|
| | | Mean | Std. Deviation | Mean | Std. Deviation | Mean | Std. Deviation |
| Landscape | Storm Flow Concentration | 1.9 | 0.333 | -0.7 | 0.242 | 0.243 | 0.182 |
| | Base Flow Concentration | 0.96 | 0.401 | -0.731 | 0.36 | -0.566 | 0.363 |
| Hardstand | Storm Flow Concentration | 2.431 | 0.333 | -0.301 | 0.242 | 0.343 | 0.205 |
| | Base Flow Concentration | 0 | 0 | 0 | 0 | 0 | 0 |
| Roof | Storm Flow Concentration | 1.301 | 0.333 | -0.886 | 0.242 | 0.301 | 0.205 |
| | Base Flow Concentration | 0 | 0 | 0 | 0 | 0 | 0 |

4.3 Treatment Node Parameters

The following sections describe the modelling parameters applied to MUSIC for each of the treatment nodes included as part of the water quality assessment.

4.4 MUSIC Results

Results of the MUSIC modelling for the treatment train effectiveness are summarised in **Table 4.7**. The results indicate the 80%, 45%, 45% and 70% reduction target for TSS, TP, TN and gross pollutants respectively are achieved. A screen capture of the MUSIC modelling results is included as **Figure 4.2**.

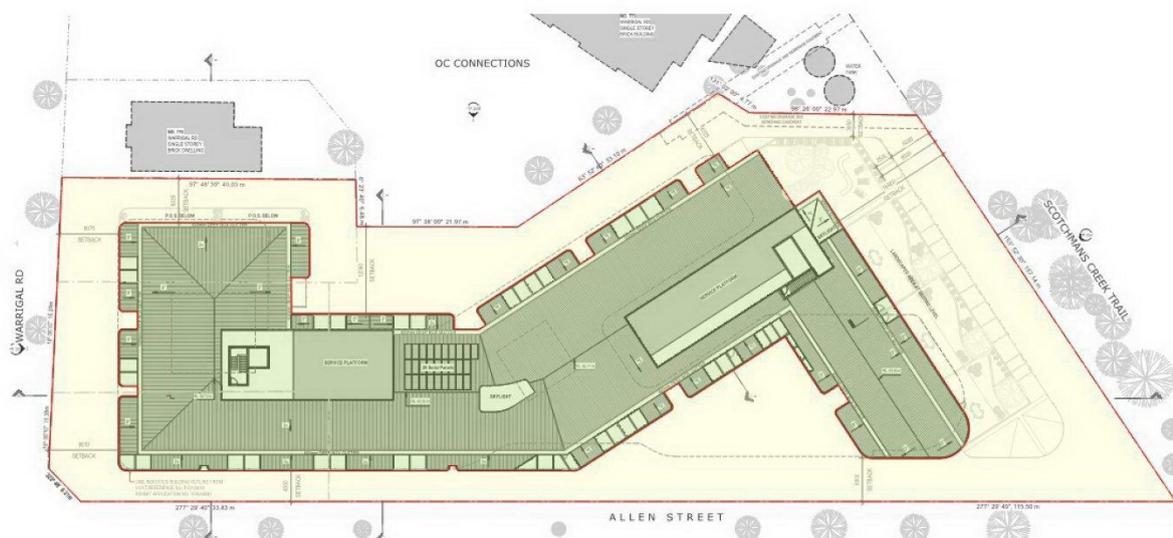


Table 4.4 Treatment Train Effectiveness

| Pollutant | Inflows (kg/yr) | Outflows (kg/yr) | Reduction Achieved (%) | Reduction Target (%) |
|------------------------|-----------------|------------------|------------------------|----------------------|
| Flow (ML/yr) | 11.9 | 2.37 | 80.1 | 0 |
| Total Suspended Solids | 285 | 55.1 | 80.7 | 80 |
| Total Phosphorus | 2.85 | 0.369 | 87.1 | 45 |
| Total Nitrogen | 25.1 | 5.18 | 79.4 | 45 |
| Gross Pollutants | 450 | 0 | 100 | 70 |


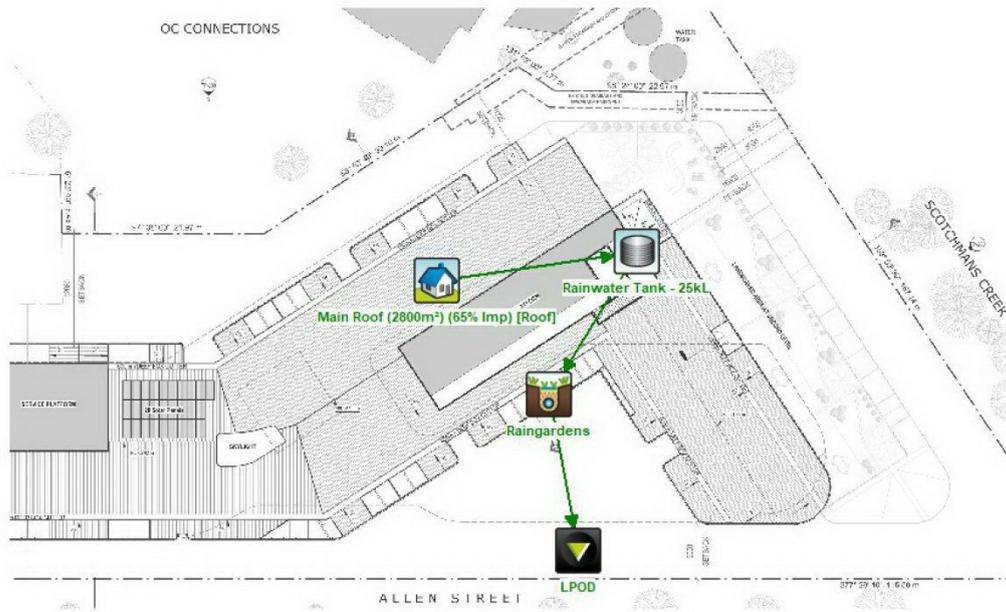


Figure 4.1: Treatment Train Effectiveness & Layout

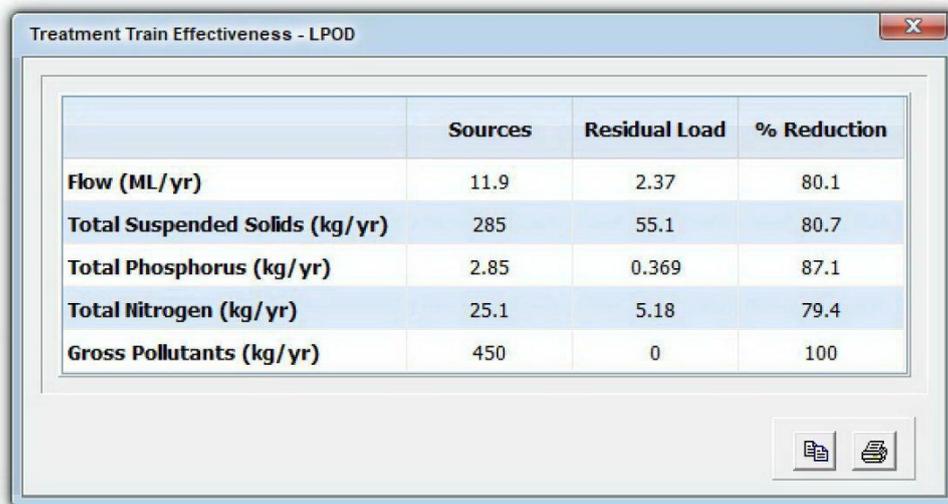

| | Sources | Residual Load | % Reduction |
|--------------------------------|---------|---------------|-------------|
| Flow (ML/yr) | 11.9 | 2.37 | 80.1 |
| Total Suspended Solids (kg/yr) | 285 | 55.1 | 80.7 |
| Total Phosphorus (kg/yr) | 2.85 | 0.369 | 87.1 |
| Total Nitrogen (kg/yr) | 25.1 | 5.18 | 79.4 |
| Gross Pollutants (kg/yr) | 450 | 0 | 100 |

Figure 4.2: Treatment Train MUSIC Model screen capture

5 Summary

Based on the water quality assessment using the MUSIC software, it is found that the pollutant reduction targets can be achieved by adopting the Rain Garden and SWAL as specified in **Table 5.1**.

Table 5.1 Recommended Stormwater Quality Improvement Devices

| Stormwater Quality Improvement Device | Quantity |
|---|----------|
| Rain Gardens (45m ² of area) | 1 |
| Minimum RWT collection (10kl) | 1 |

6 Recommendation

6.1 Stormwater Quality Improvement Device

6.1.1 Rainwater Tank

Rainwater tanks can reduce the harm to stormwater waterways caused by too much stormwater. Tank water can be reused for toilet flushing, laundry washing, gardens and lawn irrigation and car wash, this will significantly reduce the potable / drinking cold water consumption.

6.1.2 Rain Gardens

The recommended raingardens are designed to capture stormwater at the downstream end of the drainage network and treat the runoff prior to discharging into the local waterway. The pollutant reduction targets achieved (as modelled in MUSIC) are summarised in Table 6.1.

Table 6.1: MUSIC modelling results

| Pollutant | Inflows (kg/yr) | Outflows (kg/yr) | Reduction Achieved (%) | Reduction Target (%) |
|------------------------|-----------------|------------------|------------------------|----------------------|
| Flow (ML/yr) | 11.9 | 2.37 | 80.1 | 0 |
| Total Suspended Solids | 285 | 55.1 | 80.7 | 80 |
| Total Phosphorus | 2.85 | 0.369 | 87.1 | 45 |
| Total Nitrogen | 25.1 | 5.18 | 79.4 | 45 |
| Gross Pollutants | 450 | 0 | 100 | 70 |

7 Site Managements Plan During Construction

The stormwater management strategy will adopt the following procedures during construction:

- Ground water seepage shall be managed and treated prior to discharge to council's LPD by builder / contractor during construction. To protect drainage infrastructure and receiving waters from sedimentation and contamination.
- To protect the site and surrounding area from environmental degradation prior to and during construction of subdivision works.
- An application should describe how the site will be managed prior and during the construction period and may set out requirements for managing:
 - Erosion and sediment.
 - Stormwater.
 - Litter, concrete, and other construction wastes; and
 - Chemical contamination.

8 Maintenance

The maintenance procedure shall be in conjunction with the building maintenance and specification and shall Comply with relevant / applicable authority design guidelines and codes of practice requirements. The stormwater management strategy shall adopt the following maintenance procedures.

- Quarterly routine maintenance procedure to thoroughly maintain raingarden free of debris and general clean-up process by building management as part of building maintenance programme.
- Annually / 6-month drain and flushing of rainwater tank cleaning tank internally from debris and sediment collection captured from roof surface, by building management as part of building maintenance programme.
- Quarterly inspection of gutters to ensure they are free of debris and clean as required.
- Quarterly inspection of stormwater downpipes and grates to ensure no water leakage, they are free of debris and clean as required.
- Yearly inspections of rainwater tanks and supports to ensure no leakage, inspect joints and clean as required.
- Water storage tanks should be inspected, cleaned and disinfected in accordance with AS 3500.
- Bi-annual inspection of pumps to ensure correct operation, no leakage and clean as required.
- Service items and equipment in conformance with the maintenance schedules as per the operation and maintenance manuals.
 - Carry out the manufacturers' recommended maintenance instruction.
 - Attend to reported defects and complaints.
 - Check for and repair corrosion.
 - Check for and rectify any unsafe conditions.
 - Replace faulty or damaged parts and consumable components.
 - connections, for deterioration and for freedom of movement of assembly.
 - Identification of pipes, conduits and ducts maintenance: To AS 1345.
 - Safety signs maintenance: To AS 1319.
 - Remove waste and clean all parts of the installation.
 - Remove temporary protective coatings, packaging and labels.
 - Clean screens and strainer baskets.

9 References

The report has used the following references:

- Melbourne Water (2018) MUSIC Guidelines – input Parameters and modelling approaches for MUSIC user in Melbourne Water’s services area 2018.
- Urban Stormwater Best Practice Environmental Management Guidelines.